

BioEcoCleanTM for grease traps

cleaner + odour control

product: 20260L

Grease Trap Treatment

The BioEcoClean Grease Trap solution is a revolutionary product that leads the industry in its effectiveness in reducing and controlling H₂S* derived odour in grease traps and septic tanks. It also reduces the BOD (biological oxygen demand), COD's (chemical oxygen demand), and TSS (total suspended solids).

BioEcoClean products are CFIA approved for use in food establishments and are created from all natural ingredients.

Automated Dosing System

BioEcoClean Grease Trap Solutions can be dispensed automatically. The dilution ratio is calculated for maximum effectiveness.

Product is available in 5 gallon pails or 55 gallon drums.

20260L


5 gal.

MSRP avail upon request



Odour Control

H₂S Reduction

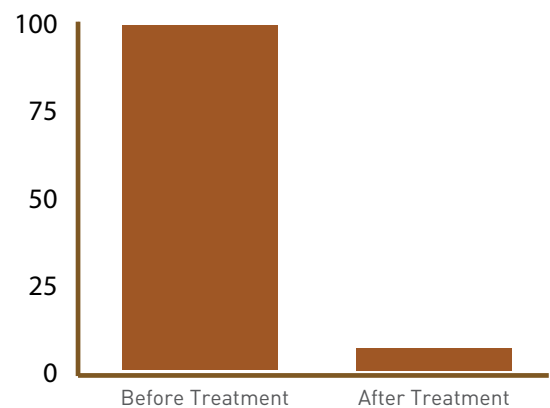

Extremely effective in reducing odours in grease traps, garbage bins, and refuse areas. Its special all natural formula dramatically reduces strong H₂S* gases created by decaying organic matter.

* H₂S - Hydrogen Sulfide: CAS Number: 7783-06-4

A flammable, poisonous gas that has an odor suggestive of rotten eggs.

BioEcoCleanTM for grease traps

Directions

Initializing: for standard 8 - 10 g/l of grease/fat/oil content add 2 lbs. per 1,000 litres of grease trap water every day for 5 days.

For maintenance: add 2 lbs. of product per cubic metre of grease trap capacity once per week.

Safe for the environment as well as plumbing and septic tanks.

Ingredients:

Enzyme blend, DSL listed safe micro-organisms and food grade nutrients. Store in cool and dry place.

HEALTH: 1, FLAMMABILITY: 0, REACTIVITY: 0
WHMIS Class: D-2B

CAUTION! EYE IRRITANT


Avoid contamination of food during the application and storage of this product. Do not use on food contact surfaces. KEEP OUT OF REACH OF CHILDREN!
HARMFUL IF SWALLOWED!

Made in Canada
20260L




Greentail Environmental Inc.

303-1228 Hamilton St. Vancouver, BC V6B 2T4
604.682.8898 sales@greentail.ca
www.greentail.ca

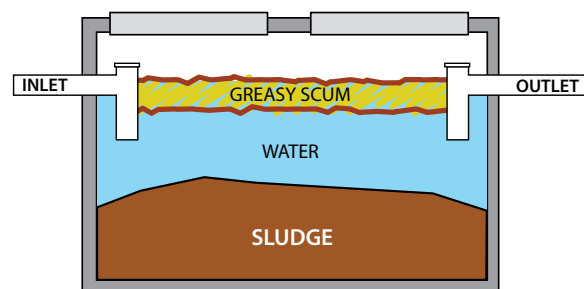

Grease Trap before BioEcoCleanTM treatment.
High levels of decomposing grease scum and sludge present creating high levels of H₂S odour.

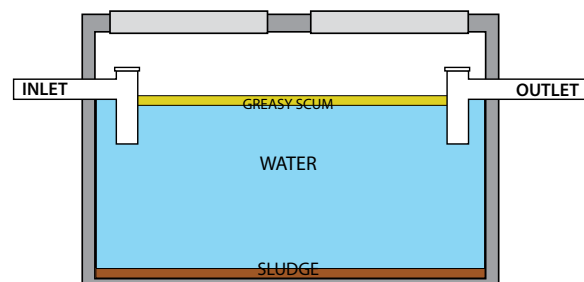

Grease Trap after BioEcoCleanTM treatment.
Grease scum and sludge are under control and minimized drastically reduce obnoxious odours.



Available in 5 gallon pails (shown) or 55 gallon drums